


OP3634 LATERNA

Stem Suspension



VisaLighting.com/products/Laterna

Type: _____ Project: _____ Location: _____

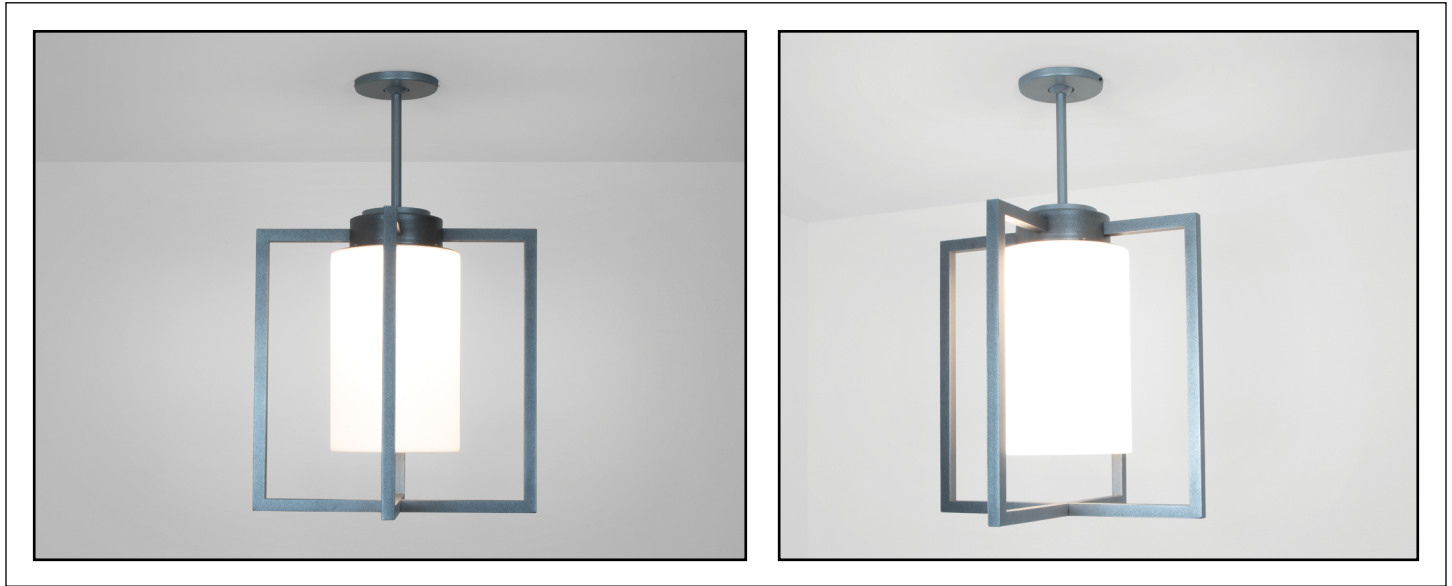


DIMENSIONS⁴

OAH MUST BE SPECIFIED

W = Width OAH = Overall Height X = Body Height
 Y = Diffuser Height WT = Weight MAX OAH = Maximum Overall Height


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(42) indicates an overall fixture height of 42"

W	17-1/2"	(445 mm)
OAH	42"	(1067 mm)
MAX OAH	114"	(2896 mm)
X	19-1/8"	(486 mm)
Y	12-1/4"	(311 mm)
WT	15 lbs	



Stem weight = 0.1 lb/in, to determine hanging weight, add or subtract this weight from the standard OAH Weight


RELATIVE SCALE DRAWING

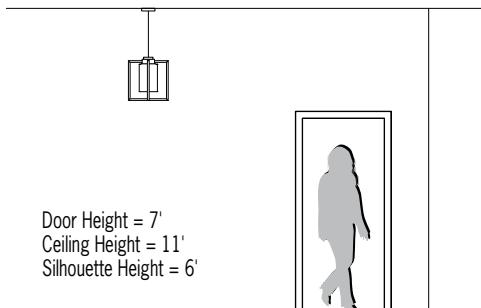


FEATURES

- High and low lumen output
- Integral driver
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal
- Aluminum weldment cage; cast aluminum mounting component
- **Top tether option. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Matte white acrylic diffuser or optional frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish; 16 color options
- ETL listed for wet locations

PHOTOMETRICS



Frosted Cylinder



White Cylinder



OP3634 LATERNA (cont.)

Stem Suspension

Fill in shaded boxes using information listed below

OP3634		MVOLT				
MODEL	SOURCE¹ L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	VOLTAGE MVOLT	FINISH See last page for finish order codes	DIFFUSER OPTION² FRST Cylinder is white acrylic if no option is selected	TETHER OPTION³ TH	OAH⁴ See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens		Power (Watts)
		White Cylinder	Frosted Cylinder	
L30K(H)	3000K	2400	2900	29
L30K(L)	3000K	1500	1900	18
L35K(H)	3500K	2500	3000	29
L35K(L)	3500K	1600	1900	18
L40K(H)	4000K	2500	3000	29
L40K(L)	4000K	1600	1900	18

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

DIFFUSER OPTION²



Cylinder is matte white if no option is selected

FRST	Frosted translucent cylinder
-------------	------------------------------



TETHER OPTION³

TH Top tether option; four 15' cable tethers included

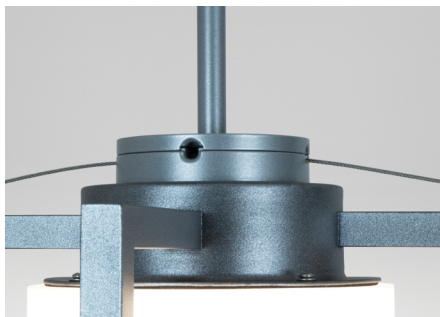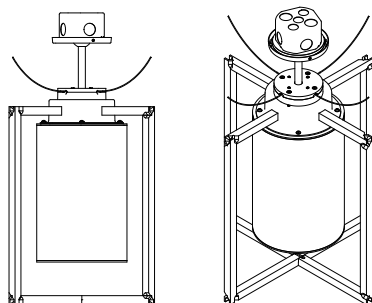

Tether Option Cap



OP3634 LATERNA (cont.)

Stem Suspension



LATERNA PRODUCT FAMILY

- OP3630 – Cord and Cable Suspension
- OP3632 – Catenary Suspension
- OP3634 – Stem Suspension

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/products/Laterna](https://visalighting.com/products/Laterna) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VLBK Velvet Black	VNRD Vineyard Red