


# CP2600 SAIL™

18" \_24" \_32" Diameters



[VisaLighting.com/products/Sail](https://VisaLighting.com/products/Sail)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

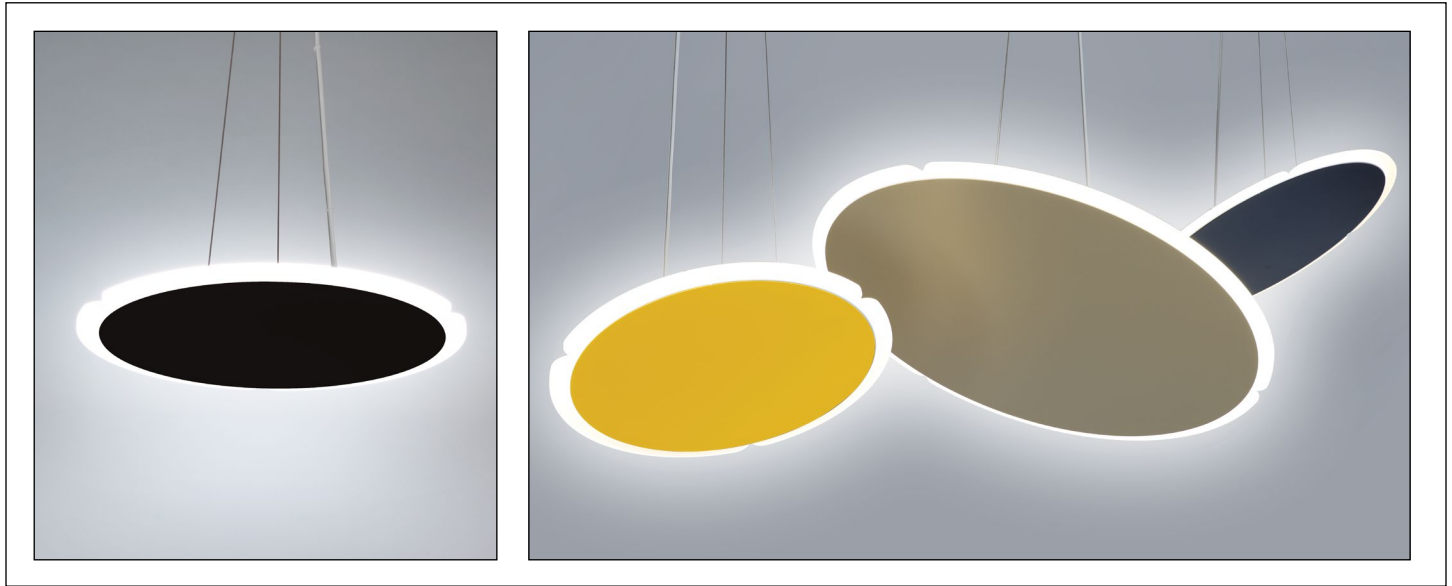


## DIMENSIONS<sup>1,6</sup>

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(144) indicates an overall fixture height of 144"


DIA = Diameter X = Body Height OAH = Std Overall Height WT = Weight

	CP2600-18	CP2600-24	CP2600-32
<b>DIA</b>	18-3/8" (467 mm)	23-3/4" (603 mm)	31-3/4" (806 mm)
<b>X</b>	1/2" (13 mm)		
<b>MIN OAH</b>	6" (152 mm)	9" (229 mm)	12" (305 mm)
<b>OAH</b>	72" (1829 mm)	84" (2134 mm)	96" (2439 mm)
<b>WT</b>	6 lbs (2722 gm)	9 lbs (4002 gm)	14 lbs (6350 gm)

Note: all sizes can be ordered with SDC or RMD driver option

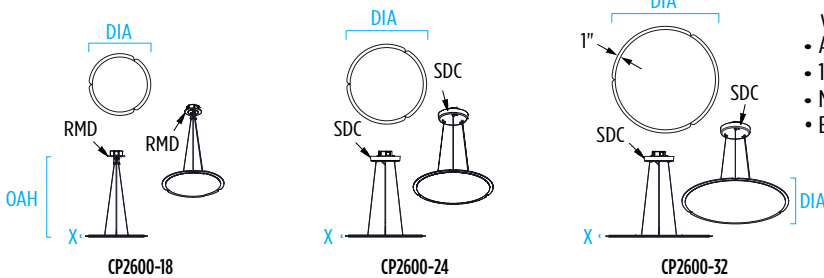

## RELATIVE SCALE DRAWING

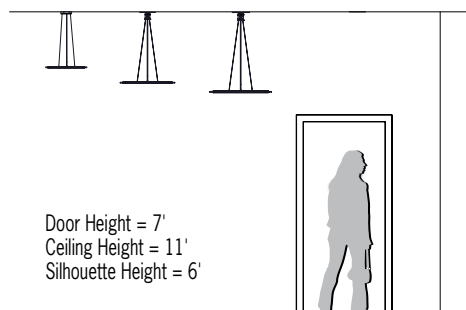


## FEATURES

- Available in 18", 24" and 32" nominal diameters
- Fixture can be hung at various angles – some field adjustability. Maximum angle is 30°
- High or low lumen output; ambient illumination; 0-10 VDC dimming to 1%
- Optional 90+ CRI
- Efficient LED array is enhanced with EdgeGlide™ Optics
- Suspended by three 1/16" diameter stainless steel cables. Cables can be field adjusted to shorter length at the canopy during installation
- 3 power cord color options
- Remote Driver (RMD) or Driver in Canopy (SDC) configurations available
- Remote Driver (RMD) includes round canopy 5" diameter and 1/4" deep
- Driver in canopy (SDC) includes round canopy 8-7/8" diameter and 1-1/2" deep
- Canopy mounts over standard octagonal junction box (by others) with provided hardware and is painted white
- Aluminum housing
- 1/4" thick acrylic lens
- Non-VOC powder coat finishes
- ETL listed for damp locations. Not suitable for exterior applications

See last page for suggested variations

## PHOTOMETRICS



EdgeGlide™

VisaLighting.com



# CP2600 SAIL (cont.)

18" \_24" \_32" Diameters



Fill in shaded boxes using information listed below

- MVOLT							
<b>MODEL<sup>1</sup></b> CP2600-18 CP2600-24 CP2600-32  See page 1	<b>SOURCE<sup>2</sup></b> L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	<b>VOLTAGE</b>	<b>SOURCE OPTION<sup>3</sup></b> 90CRI  Minimum 80CRI standard if option not selected	<b>FINISH</b>  See last page for finish order codes	<b>DRIVER<sup>4</sup></b> RMD SDC  Canopy is painted white	<b>POWER CORD<sup>5</sup></b> COLOR BSC GSC WSC	<b>OAH<sup>6</sup></b>  See page 1

**SOURCE<sup>2</sup>** (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, 3-step MacAdam

Source	CCT	CP2600-18		CP2600-24		CP2600-32	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
L30K(H)	3000K	2900	28	4200	39	5400	55
L30K(L)	3000K	1550	14	2200	19	2800	27
L35K(H)	3500K	3000	28	4300	39	5500	55
L35K(L)	3500K	1600	14	2300	19	2900	27
L40K(H)	4000K	3100	28	4400	39	5700	55
L40K(L)	4000K	1650	14	2300	19	3000	27

**DRIVER<sup>4</sup>** (Select one)

<b>SDC</b>	Surface canopy with integral driver; canopy is painted white
<b>RMD</b>	Remote driver enclosure, has knockouts for conduit connection, may be recess mounted and suitable for insulation contact (type IC)

**POWER CORD COLOR<sup>5</sup>** (Select one)

<b>BSC</b>	Black power cord
<b>GSC</b>	Gray power cord
<b>WSC</b>	White power cord



**VOLTAGE**

<b>MVOLT</b>	120-277V, 50/60 Hz
--------------	--------------------

**DOWNLIGHT LUMEN MAINTENANCE RATING**


L89 (reported)	>69,000 hrs
----------------	-------------

**SOURCE OPTION<sup>3</sup>**

Minimum 80CRI within 3-step MacAdam is standard if 90CRI is not selected

<b>90CRI</b>	Color rendering index minimum 90 CRI, (typical 93); minimum R9 value of 50 (delivered lumens reduced by 15%)
--------------	--

**DRIVER AND CANOPY DETAIL**

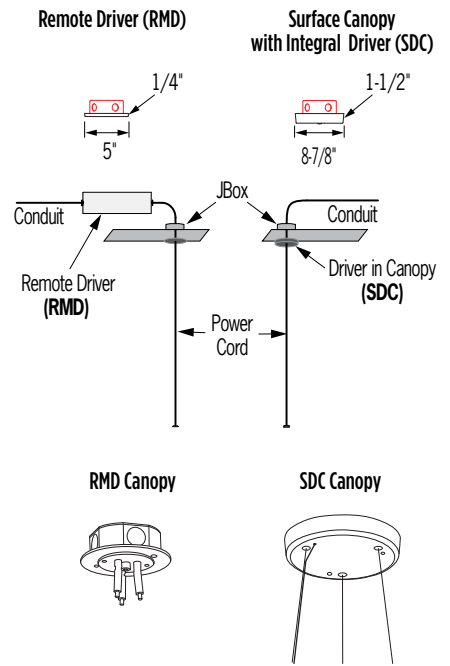


See page 3 for more Remote Driver Information

# CP2600 SAIL (cont.)

## 18" \_24" \_32" Diameters

### REMOTE DRIVER (RMD) INFORMATION

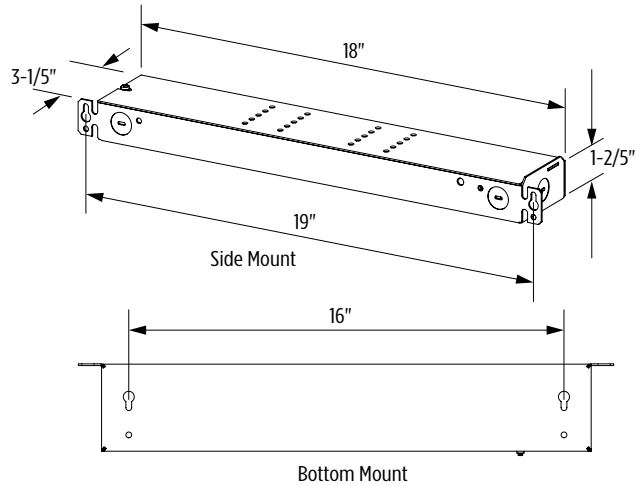


Remote driver boxes have knockouts for conduit connections

### Maximum Recommended Remote Wiring Distance from RMD to fixture canopy

- 18AWG – 25ft
- 16AWG – 40ft
- 14AWG – 65ft
- 12AWG – 100ft
- 10AWG – 150ft

### TOP VIEW (ALL SIZES)

Note: all sizes can be ordered with SDC or RMD driver option

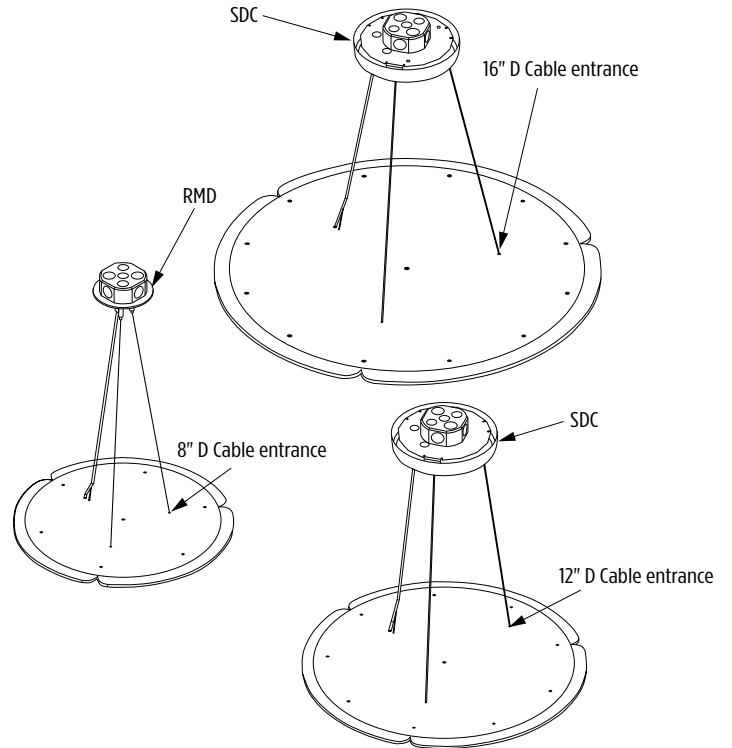

# CP2600 SAIL (cont.)

## 18" \_24" \_32" Diameters



### SAIL PRODUCT FAMILY

- CP2600-18 – 18" Diameter
- CP2600-24 – 24" Diameter
- CP2600-32 – 32" Diameter

### SUGGESTED VARIATIONS

- Custom colors
- Single piece acrylic
- Other shapes
- Top and bottom panels painted different colors

See [VisaLighting.com/products/Sail](https://VisaLighting.com/products/Sail) for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).  
For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
						
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Siver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
						
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	