


# OP3640 LATERNA CORE

## Stem Suspension



[VisaLighting.com/products/Laterna](https://VisaLighting.com/products/Laterna)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

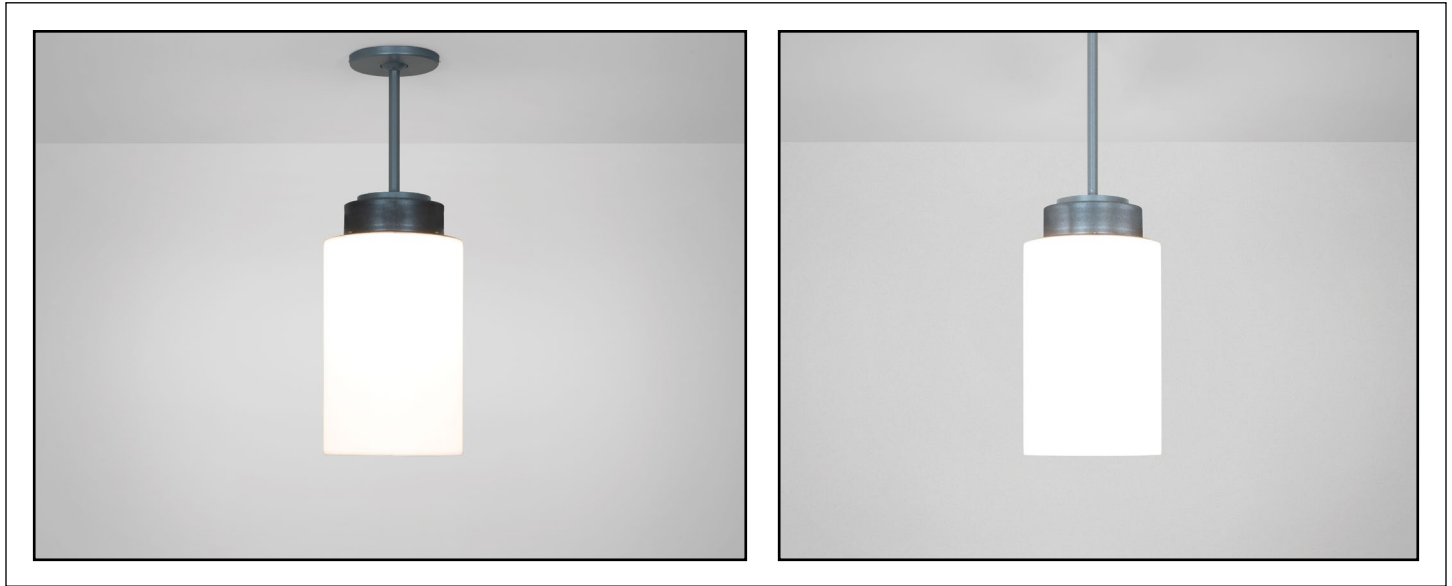


### DIMENSIONS<sup>4</sup>

**OAH MUST BE SPECIFIED**

W = Width OAH = Overall Height X = Body Height  
 Y = Diffuser Height WT = Weight MAX OAH = Maximum Overall Height


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(42) indicates an overall fixture height of 42"

W	8"	(203 mm)
OAH	48"	(1219 mm)
MIN OAH	20"	(508 mm)
MAX OAH	114"	(2896 mm)
X	15-3/8"	(391 mm)
Y	12-1/4"	(311 mm)
WT	15 lbs	



Stem weight = 0.1 lb/in, to determine hanging weight, add or subtract this weight from the standard OAH Weight


### RELATIVE SCALE DRAWING

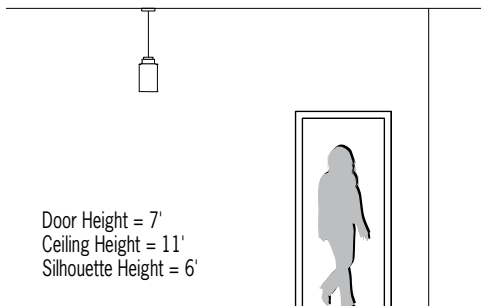


### FEATURES

- High and low lumen output
- Integral driver
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal
- Cast aluminum mounting component
- **Top tether option. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Matte white acrylic diffuser or optional frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish; 16 color options
- ETL listed for wet locations

### PHOTOMETRICS



Frosted Cylinder



White Cylinder



# OP3640 LATERNA CORE (cont.)

## Stem Suspension

Fill in shaded boxes using information listed below

<b>OP3634</b>		<b>MVOLT</b>					
<b>MODEL</b>	<b>SOURCE<sup>1</sup></b> L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	<b>VOLTAGE</b> MVOLT	<b>FINISH</b>  See last page for finish order codes	<b>DIFFUSER OPTION<sup>2</sup></b> FRST  Cylinder is white acrylic if no option is selected	<b>TETHER OPTION<sup>3</sup></b> TH	<b>OAH<sup>4</sup></b>  See page 1	

**SOURCE<sup>1</sup>** (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens		Power (Watts)
		White Cylinder	Frosted Cylinder	
L30K(H)	3000K	2400	2900	29
L30K(L)	3000K	1500	1900	18
L35K(H)	3500K	2500	3000	29
L35K(L)	3500K	1600	1900	18
L40K(H)	4000K	2500	3000	29
L40K(L)	4000K	1600	1900	18

**VOLTAGE**

<b>MVOLT</b>	120-277V, 50/60 Hz
--------------	--------------------

**DIFFUSER OPTION<sup>2</sup>**



Cylinder is matte white if no option is selected

<b>FRST</b>	Frosted translucent cylinder
-------------	------------------------------



**TETHER OPTION<sup>3</sup>**

**TH** Top tether option; four 15' cable tethers included

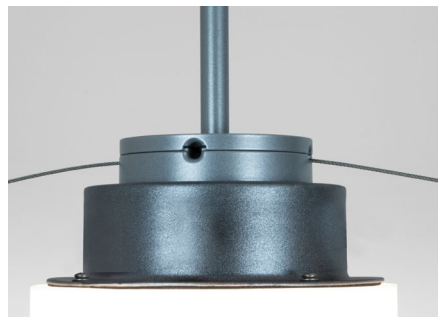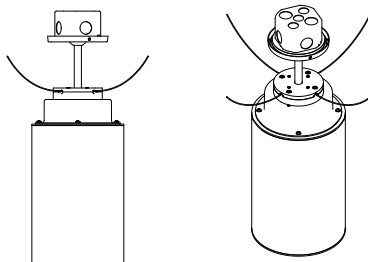

Tether Option Cap

# OP3640 LATERNA (cont.)

## Stem Suspension



### LATERNA PRODUCT FAMILY

- OP3630 – Cord and Cable Suspension
- OP3632 – Catenary Suspension
- OP3634 – Stem Suspension

See [Visalighting.com/products/Laterna](https://visalighting.com/products/Laterna) for more information





### SUGGESTED VARIATIONS

- Remote driver
- Custom colors
- Longer or Shorter Diffusers (5" minimum)
- Add spun cutoff shade (shade shape similar to Rocket & Brin)

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
						
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Siver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
						
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

