

CP3970 OMNIENCE™

26" Diameter - Aircraft Cable



Visalighting.com/products/Omnience

Type: _____ Project: _____ Location: _____




DIMENSIONS⁴

▲ OAH must be specified

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.
 Example - OAH(24) indicates an overall fixture height of 24". MP is the distance (in inches) from the bottom of the fixture to the bottom of the Stem Accent Junction.

W = Width X = Body Height OAH = Standard Overall Height MP = Midpoint


W	26"	(660 mm)
OAH	24"	(610 mm)
X	6-3/4"	(171 mm)
MP	20-1/2"	(521 mm)

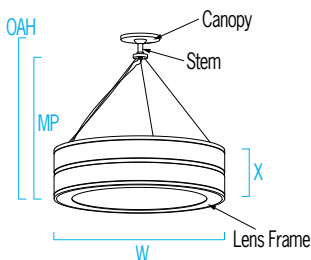


FEATURES

- Integral driver
- Modular design for replacement of LED source and driver
- Upper perforations provide a luminous glow to reduce ceiling contrast if UPLT option is selected
- Mounts through 4" octagonal 2-1/8" deep electrical junction box (by others) with provided hardware for ceiling slopes up to 45° from horizontal
- Rolled extruded aluminum housing
- 1/8" thick diffuser with matte finish
 - UV stable
- Optional specialty diffuser materials available, including Vara Kamin's Impressions of Light® images which are replicated from Vara Kamin's original works of art
- Optional 1/8" thick impact resistant polycarbonate clear lens cover
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING

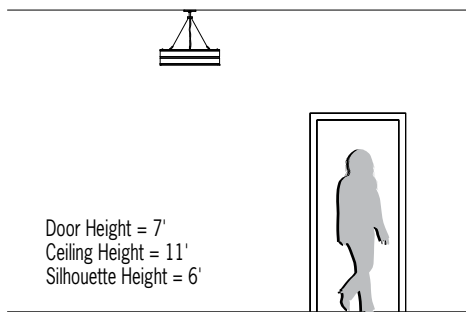

PHOTOMETRICS

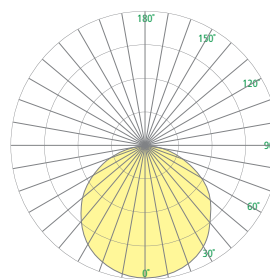

Buy American Compliant



XPS



ETL Listed



5 Year Warranty

CP3970 OMNIENCE (cont.)

26" Diameter - Aircraft Cable



Fill in shaded boxes using information listed below

CP3970		-	MVOLT			
MODEL	SOURCE ¹		VOLTAGE MVOLT	FINISH	DIFFUSER ²	OPTION(S) ³
	<ul style="list-style-type: none"> L30K L35K L40K 			See last page for finish order codes	IRP	UPLT XPS
						OAH ⁴
						See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 83CRI within 3-step MacAdam

Sources	CCT	Delivered Lumens	Power (Watts)
● L30K	3000K	9300	110
L35K	3500K	9300	110
● L40K	4000K	9600	110

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

DIFFUSER OPTIONS²

Diffuser is matte white acrylic

IRP	Impact resistant polycarbonate lens
-----	-------------------------------------

OPTIONS³ (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

UPLT	Lensed aperture in housing produces 3.8% uplight
XPS	Express 10 day shipping. Items marked with a bullet (●) are not available with XPS

CP3970 OMNIENCE (cont.)

26" Diameter - Aircraft Cable



OMNIENCE PRODUCT FAMILY

Aircraft Cable	26" Diameter	• CP3970
	34" Diameter	• CP3975
	48" Diameter	• CP3995
Stem	26" Diameter	• CP3980
	34" Diameter	• CP3985
	48" Diameter	• CP3990
Ceiling Mount	26" Diameter	• CM1830

SUGGESTED VARIATIONS



- Remote driver
- Custom colors

See [Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
						
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
						
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

