


# CP7128 ZUME™ IN DL

Indoor Luminous Globe with RGBW Bodylight and White Downlight



[VisaLighting.com/products/Zume-DL](http://VisaLighting.com/products/Zume-DL)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

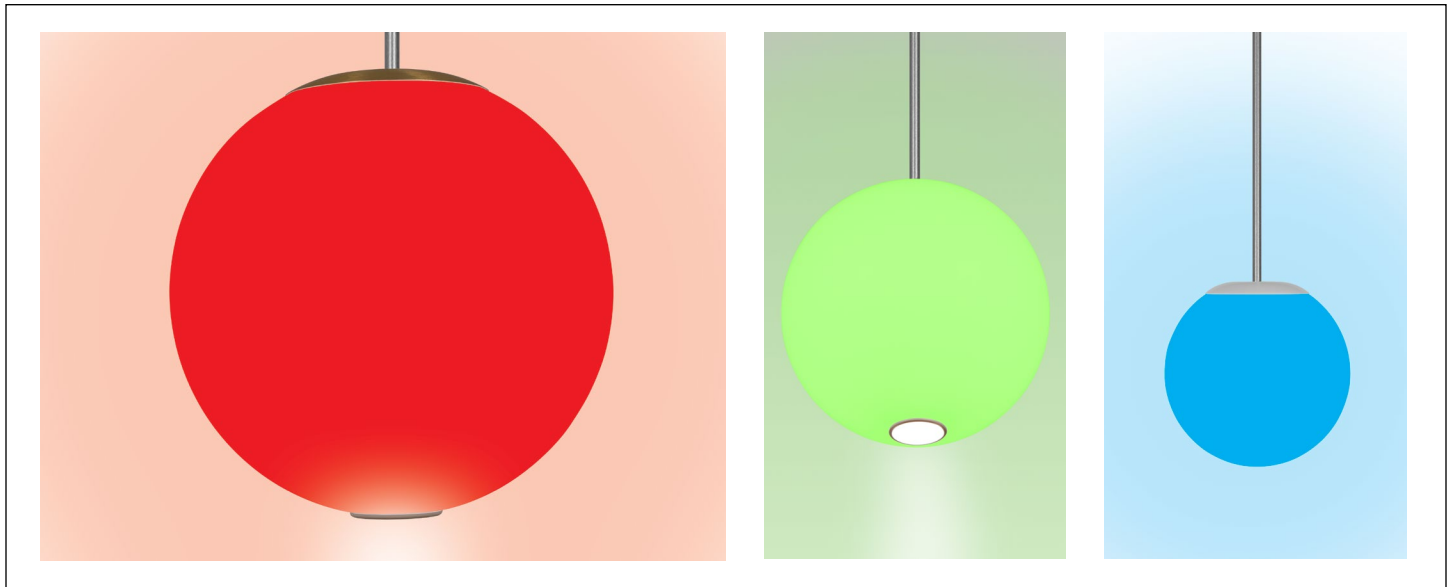


## DIMENSIONS <sup>1,6</sup>

**OAH MUST BE SPECIFIED**


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.

DIA = Diameter OAH = Standard Overall Height WT=Weight

CP7128-	12	16	22
DIA	12" (305 mm)	16" (406 mm)	22" (559 mm)
MIN OAH	20" (508 mm)	24" (610 mm)	30" (762 mm)
STD OAH	72" (1829 mm)	72" (1829 mm)	72" (1829 mm)
MAX OAH	192" (4877 mm)	192" (4877 mm)	192" (4877 mm)
WT	12 lbs	13 lbs	16 lbs

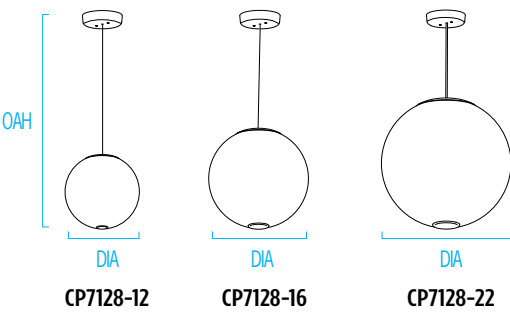


## RELATIVE SCALE DRAWING

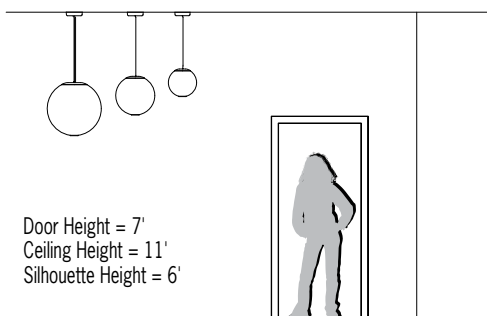

## FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Downlight, 0-10V dimmable (controls by others), with optional narrow, medium, or wide optical distribution
- Remote driver (RMD) standard, suitable for insulation contact (Type IC)
- Includes round canopy 5-1/4" diameter and 1/2" deep
- Suspended by 5/8" diameter stem
- Canopy mounts over 4" octagonal junction box (by others) with provided hardware. Canopy finished to match cap, stem and bezel
- One piece gloss white acrylic globe for seamless appearance
- Optional DMX control for downlight
- Non-VOC powder coat finishes
- ETL listed for damp locations. Not suited for exterior application

## SPHERE PHOTOMETRICS

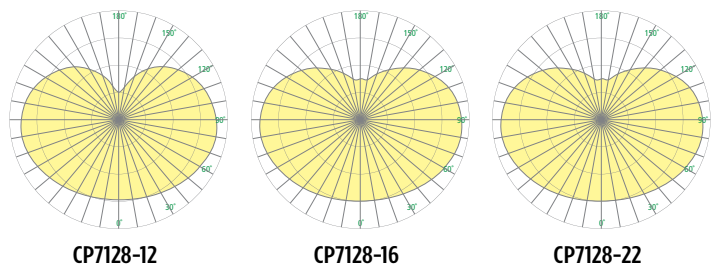

# CP7128 ZUME™ IN DL (cont.)

Indoor Luminous Globe with RGBW Bodylight and White Downlight



Fill in shaded boxes using information listed below

CP7128		RGBW				- MVOLT			
<b>MODEL</b>	<b>DIAMETER<sup>1</sup></b> 12" 16" 22"	<b>BODYLIGHT SOURCE</b> RGBW	<b>DOWNLIGHT<sup>2</sup> SOURCE</b> L30K L35K L40K	<b>DOWNLIGHT<sup>3</sup> OUTPUT</b> LOW (L) MED (M) HIGH (H)	<b>DOWNLIGHT<sup>4</sup> OPTIC</b> NRW MED WIDE	<b>VOLTAGE MVOLT</b>	<b>CAP, STEM AND CANOPY FINISH</b>	<b>OPTION<sup>5</sup> DMX</b>	<b>OAH<sup>6</sup></b>  See page 1
	See page 1						See last page for finish order codes		

**BODYLIGHT SOURCE**

Channel(s)	Delivered Lumens		
	CP7128-12	CP7128-16	CP7128-22
Red Only	130	195	245
Green Only	335	500	625
Blue Only	60	90	115
3000K Only (80CRI min)	430	640	805
All ON	885	1315	1645
Power (Watts)	20	28	38

**LUMEN MAINTENANCE RATING**

<b>L85</b>	> 55,000 HRS
------------	--------------

**DOWNLIGHT<sup>2</sup>** (Select one)


DOWNLIGHT SOURCE	CCT
L30K	3000K
L35K	3500K
L40K	4000K

**DOWNLIGHT OUTPUT<sup>3</sup>** (Select one)


Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

Option	Delivered Lumens		POWER (WATTS)
	L30K/L35K	L40K	
LOW	860	875	6
MED	1400	1425	10
HIGH	2000	2040	15


Downlight Optic <sup>4</sup>	
NRW	27° Beam
MED	41° Beam
WIDE	52° Beam



CP7128-NRW



CP7128-MED



CP7128-WIDE

**MAX REMOTE DISTANCE PER FIXTURE**

WIRE AWG	Maximum Distance (Ft)		
	CP7128-12	CP7128-16	CP7128-22
12	100	100	100
14	100	100	100
16	100	75	50
18	75	50	40

All distances in feet

**OPTION<sup>5</sup>** (Select one)



<b>DMX</b>	DMX control of downlight
------------	--------------------------

# CP7128 ZUME™ IN DL (cont.)

## Indoor Luminous Globe with RGBW Bodylight and White Downlight



### REMOTE DRIVER (RMD) INFORMATION

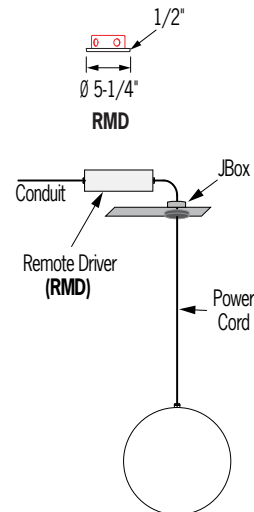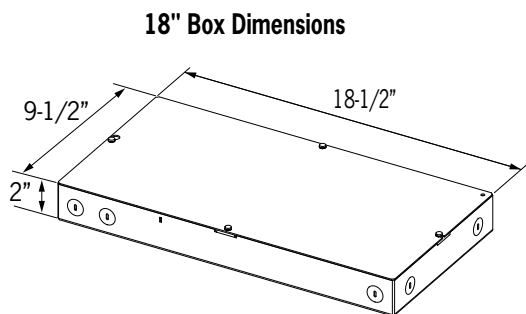

Remote driver boxes have knockouts for conduit connections

**\*\*Multiple fixtures can be powered by one remote driver (RMD). Please contact factory to help configure your installation.**

Driver and DMX module included with each fixture

### DMX SETTINGS AND MAXIMUM LUMEN OUTPUTS FOR VARIOUS COLORS

Color	8-Bit DMX values				Max Lumens		
	R	G	B	W	CP7128-12	CP7128-16	CP7128-22
Red	255	0	0	0	133	197	247
Green	0	255	0	0	337	500	626
Blue	0	0	0	255	62	92	115
2700K	52	0	3	255	461	684	857
3000K	0	0	0	255	434	644	808
3500K	7	21	25	255	470	697	873
4000K	15	61	34	255	532	789	989
5000K	22	100	79	255	594	881	1104
6500K	8	87	138	255	585	868	1088

# CP7128 ZUME™ IN DL (cont.)

## Indoor Luminous Globe with RGBW Bodylight and White Downlight



### ZUME PRODUCT FAMILY

Indoor	White LED		RGBW	
Zume In	<ul style="list-style-type: none"> <li>• CP7120-8</li> <li>• CP7120-12</li> <li>• CP7120-16</li> </ul>	<b>Cord Suspension</b>	<ul style="list-style-type: none"> <li>• CP7126-8</li> <li>• CP7126-12</li> <li>• CP7126-16</li> </ul>	<b>Stem</b>
	<ul style="list-style-type: none"> <li>• CP7120-22</li> </ul>	<b>Cord &amp; Cable Suspension</b>	<ul style="list-style-type: none"> <li>• CP7126-22</li> </ul>	
Zume DL	<ul style="list-style-type: none"> <li>• CP7122-12</li> <li>• CP7122-16</li> <li>• CP7122-22</li> </ul>	<b>Cord &amp; Cable Suspension</b>	<ul style="list-style-type: none"> <li>• CP7128-12</li> <li>• CP7128-16</li> <li>• CP7128-22</li> </ul>	<b>Stem</b>
<b>Outdoor</b>				
Zume Out	<b>Cord &amp; Cable Suspension</b>	<ul style="list-style-type: none"> <li>• OP2120-ShortCap — 12"</li> <li>• OP2130-ShortCap — 16"</li> <li>• OP2140-ShortCap — 20"</li> </ul>	<ul style="list-style-type: none"> <li>• OP2120-SolidCap — 12"</li> <li>• OP2130-SolidCap — 16"</li> <li>• OP2140-SolidCap — 20"</li> </ul>	<ul style="list-style-type: none"> <li>• OP2120-SlottedCap — 12"</li> <li>• OP2130-SlottedCap — 16"</li> <li>• OP2140-SlottedCap — 20"</li> </ul>
	<b>Catenary Suspension</b>	<ul style="list-style-type: none"> <li>• OP2122-ShortCap — 12"</li> <li>• OP2132-ShortCap — 16"</li> <li>• OP2142-ShortCap — 20"</li> </ul>	<ul style="list-style-type: none"> <li>• OP2122-SolidCap — 12"</li> <li>• OP2132-SolidCap — 16"</li> <li>• OP2142-SolidCap — 20"</li> </ul>	<ul style="list-style-type: none"> <li>• OP2122-SlottedCap — 12"</li> <li>• OP2132-SlottedCap — 16"</li> <li>• OP2142-SlottedCap — 20"</li> </ul>
	<b>Stem Suspension</b>	<ul style="list-style-type: none"> <li>• OP2124-ShortCap — 12"</li> <li>• OP2134-ShortCap — 16"</li> <li>• OP2144-ShortCap — 20"</li> </ul>	<ul style="list-style-type: none"> <li>• OP2124-SolidCap — 12"</li> <li>• OP2134-SolidCap — 16"</li> <li>• OP2144-SolidCap — 20"</li> </ul>	<ul style="list-style-type: none"> <li>• OP2124-SlottedCap — 12"</li> <li>• OP2134-SlottedCap — 16"</li> <li>• OP2144-SlottedCap — 20"</li> </ul>

See [Visalighting.com/families/zume](https://visalighting.com/families/zume) for more information

# CP7128 ZUME™ IN DL (cont.)

## Indoor Luminous Globe with RGBW Bodylight and White Downlight



### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)


#### Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
						
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
						
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

#### Alternative Metal Finishes (Premium)

			
<b>BBA</b> Brushed Brass Alternative	<b>BCA</b> Brushed Chrome Alternative	<b>BUA</b> Brushed Copper Alternative	<b>BZA</b> Brushed Bronze Alternative
			
<b>OBA</b> Oil-Rubbed Bronze Alternative	<b>PRA</b> Pewter Alternative	<b>RBA</b> Rustic Brass Alternative	<b>SNA</b> Satin Nickel Alternative

#### Metal Finish (Premium)


<b>BA</b> Brushed Aluminum

