


CM2500 SYMMETRY™ DL

Behavioral Health/High Abuse 4" Downlight


VisaLighting.com/products/Symmetry-DL


Type: _____ Project: _____ Location: _____

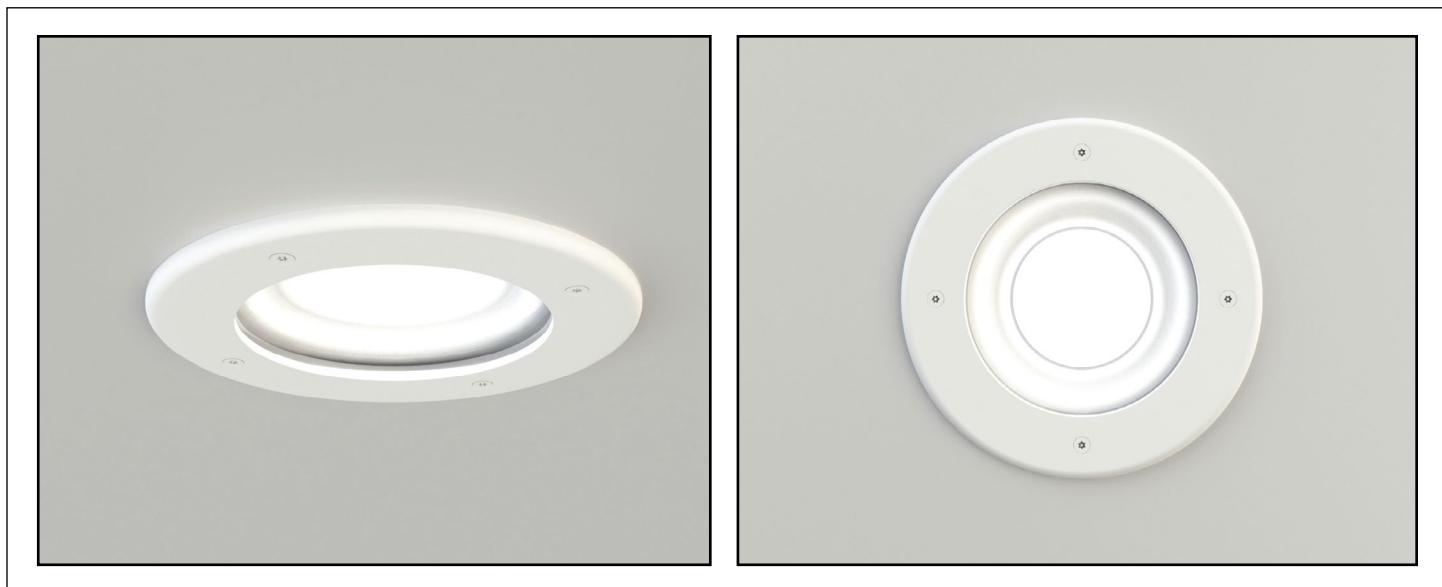

DIMENSIONS

DIA = Diameter RD = Recessed Depth


DIA 7" (178 mm)
RD 4-3/4" (121 mm)

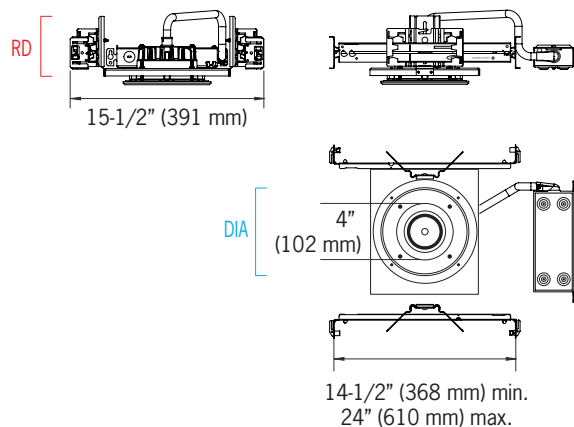

FEATURES

- Impact-resistant 1/4" polycarbonate lens with anti-scratch coating
- Machined aluminum trim ring
- Gasketed lens and trim ring
- Cast aluminum light housing
- Tamper resistant hardware
- Stainless steel flat-head pin-in Torx tamper-resistant exposed fasteners
- Matte white reflector
- Mounts to T-bar grid ceilings or drywall ceilings
- Accommodates ceilings from 1/2" to 1-1/2" thick
- Recommend adding pick-resistant caulk around the outer circumference of the trim ring during installation
- Driver may be mounted to rough-in frame, clipped to T-bar grid, mounted to structure, or remote mounted
- 90 CRI standard
- Serviceable after installation through ceiling cutout
- ETL listed for wet locations
- IK10+ impact resistance
- IP65 ingress protection
- Non-VOC powder coat finishes
- Exposed fastener heads painted to match powder coat finish
- Optional antimicrobial clear coat

PHOTOMETRICS

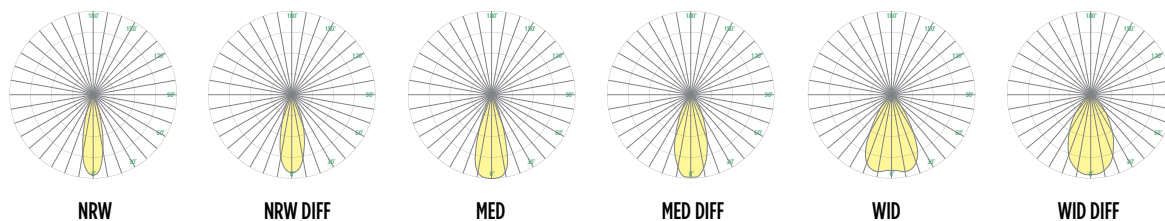

Buy American
Compliant



IK10+



IP65 Rated



ETL Listed



5 Year Warranty

CM2500 SYMMETRY DL (cont.)

Behavioral Health/High Abuse 4" Downlight



Fill in shaded boxes using information listed below

CM2500		- MVOLT																																													
MODEL	SOURCE ¹	VOLTAGE MVOLT	DOWNLIGHT ²	FINISH	OPTION(S) ³																																										
	L27K(VH) L27K(H) L27K(M) L27K(L) L27K(VL) L30K(VH) L30K(H) L30K(M) L30K(L) L30K(VL) L35K(VH) L35K(H) L35K(M) L35K(L) L35K(VL) L40K(VH) L40K(H) L40K(M) L40K(L) L40K(VL) TUN2(M) TUN2(L) TUN2(VL)		NRW MED WIDE	Exposed fastener heads painted to match powder coat finish See last page for finish order codes	AMC LMH DIFF																																										
			DOWNLIGHT ² (Select one)	TUN2 SOURCE OPTIONS ⁴ (output CCT)																																											
			<table><tr><th>OPTIC</th><th>LENS</th><th>BEAM ANGLE FWHM</th><th>PEAK CD PER 1,000 DEL LM</th></tr><tr><td>NRW</td><td>STD</td><td>27°</td><td>3690</td></tr><tr><td>NRW</td><td>DIFF</td><td>34°</td><td>2110</td></tr><tr><td>MED</td><td>STD</td><td>40°</td><td>1850</td></tr><tr><td>MED</td><td>DIFF</td><td>44°</td><td>1390</td></tr><tr><td>WIDE</td><td>STD</td><td>62°</td><td>890</td></tr><tr><td>WIDE</td><td>DIFF</td><td>63°</td><td>810</td></tr></table>	OPTIC	LENS	BEAM ANGLE FWHM	PEAK CD PER 1,000 DEL LM	NRW	STD	27°	3690	NRW	DIFF	34°	2110	MED	STD	40°	1850	MED	DIFF	44°	1390	WIDE	STD	62°	890	WIDE	DIFF	63°	810	<table><tr><th>CCT</th><th>LUMEN MULT</th></tr><tr><td>2700K</td><td>0.89</td></tr><tr><td>3000K</td><td>0.94</td></tr><tr><td>3500K</td><td>1</td></tr><tr><td>4000K</td><td>1.03</td></tr><tr><td>5000K</td><td>1.06</td></tr><tr><td>6500K</td><td>1.04</td></tr></table>	CCT	LUMEN MULT	2700K	0.89	3000K	0.94	3500K	1	4000K	1.03	5000K	1.06	6500K	1.04	
OPTIC	LENS	BEAM ANGLE FWHM	PEAK CD PER 1,000 DEL LM																																												
NRW	STD	27°	3690																																												
NRW	DIFF	34°	2110																																												
MED	STD	40°	1850																																												
MED	DIFF	44°	1390																																												
WIDE	STD	62°	890																																												
WIDE	DIFF	63°	810																																												
CCT	LUMEN MULT																																														
2700K	0.89																																														
3000K	0.94																																														
3500K	1																																														
4000K	1.03																																														
5000K	1.06																																														
6500K	1.04																																														

SOURCE¹ (Select one)

90CRI standard, 0-10V dimmable to 1%

Source	CCT	Delivered Lumens**						Power (Watts)
		STD Lens			DIFF Lens (optional) ³			
		NRW	MED	WIDE	NRW	MED	WIDE	
L27K(VH)	2700K	2250	2150	2200	2100	2050	2050	26.5
L27K(H)	2700K	1900	1800	1825	1775	1700	1725	20.5
L27K(M)	2700K	1425	1350	1375	1325	1275	1275	14.5
L27K(L)	2700K	970	910	930	910	860	870	9.5
L27K(VL)	2700K	710	680	670	670	630	640	6.5
L30K(VH)	3000K	2350	2250	2250	2200	2100	2100	26.5
L30K(H)	3000K	1975	1875	1900	1850	1750	1775	20.5
L30K(M)	3000K	1475	1400	1425	1375	1325	1325	14.5
L30K(L)	3000K	1000	950	970	950	900	900	9.5
L30K(VL)	3000K	730	710	690	700	660	660	6.5
L35K(VH)	3500K	2450	2350	2350	2300	2200	2200	26.5
L35K(H)	3500K	2050	1950	1975	1925	1825	1850	20.5
L35K(M)	3500K	1525	1450	1475	1450	1375	1375	14.5
L35K(L)	3500K	1025	980	1000	990	930	940	9.5
L35K(VL)	3500K	770	740	720	730	680	690	6.5
L40K(VH)	4000K	2550	2400	2450	2400	2300	2300	26.5
L40K(H)	4000K	2100	2000	2050	2000	1900	1925	20.5
L40K(M)	4000K	1600	1500	1525	1500	1425	1425	14.5
L40K(L)	4000K	1075	1025	1025	1025	970	980	9.5
L40K(VL)	4000K	800	770	750	750	710	720	6.5
TUN2(M) *	2700K-6500K	1525	1450	1475	1450	1375	1375	19.4
TUN2(L) *	2700K-6500K	1025	980	1000	970	930	930	12
TUN2(VL) *	2700K-6500K	760	720	730	710	680	690	8.6

CM2500 SYMMETRY DL (cont.)

Behavioral Health/High Abuse 4" Downlight



OPTIONS³ (Multiple Selections Allowed)

AMC	Antimicrobial coating (No VOC) for painted surface
LMH	Longer Mounting Hardware
DIFF	Diffuser Film

SYMMETRY PRODUCT FAMILY

Behavioral Health – 4" Downlight	CM2500 – 4"
Behavioral Health – Overbed	CM1976-W – 45"
	CM1986-W – 23"
Behavioral Health – General Use	CM1978-W – 45"
	CM1988-W – 23"
Behavioral Health – Tunable	CM1978-T – 45"
	CM1988-T – 23"
Overbed	CM1970-W – 45"
	CM1980-W – 23"
General Use	CM1972-W – 45"
	CM1982-W – 23"
Tunable	CM1972-T – 45"
	CM1988-T – 23"

SUGGESTED VARIATIONS

- Alternate controls/dimming
- Internal color filter/gel

See [Visalighting.com/products/Symmetry-DL](https://visalighting.com/products/Symmetry-DL) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

