

**CV1970 – SLEIGHT™**  
16" Recessed Mount - Integral Power Supply



Type: Project:

[VisaLighting.com/products/Sleight](http://VisaLighting.com/products/Sleight)

Fill in shaded boxes using information listed below

Order Code: **CV1970** MODEL **A** SOURCE **MVOLT** VOLTAGE **B** FINISH **C** TILE TRIM FLANGE FINISH **D** OPTION(S)




A simple edge-lit form provides performance illumination in a low profile package. Its petite size makes it ideal for corridor spaces. This wall grazing product integrates with architectural design with either surface mount or semi-recessed with mud-in frame versions. The minimalist style is also available as a pendant.

**DIMENSIONS**

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth  
RW = Recessed Width RH = Recessed Height RD = Recessed Depth

|    |        |          |    |         |          |
|----|--------|----------|----|---------|----------|
| W  | 16"    | (406 mm) | RW | 16-1/2" | (419 mm) |
| H  | 1-3/8" | (35 mm)  | RH | 1-7/8"  | (48 mm)  |
| SD | 1-3/8" | (35 mm)  | RD | 3-3/8"  | (86 mm)  |

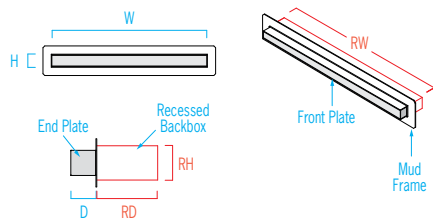

**A SOURCE (Select one) and VOLTAGE**

MVOLT fixture accepts 120 through 277 input voltage  
Minimum 80CRI, within 3-step MacAdam

| LED Sources | CCT   | Delivered Lumens | Power (Watts) | Voltage |
|-------------|-------|------------------|---------------|---------|
| L30K-L      | 3000K | 250              | 7             | MVOLT   |
| L35K-L      | 3500K |                  |               |         |
| L40K-L      | 4000K |                  |               |         |
| L30K-H      | 3000K | 550              | 15            |         |
| L35K-H      | 3500K |                  |               |         |
| L40K-H      | 4000K |                  |               |         |

**B FINISH (Select one)**

Specify color code when ordering. For accurate color matching, individual paint and finish samples are available upon request. For additional information see [VisaLighting.com/finishes](http://VisaLighting.com/finishes)

Powder Coat Painted Finishes (Standard)

|                          |                             |                          |                             |
|--------------------------|-----------------------------|--------------------------|-----------------------------|
| <b>AG7038</b> Agate Grey | <b>CVBL</b> Cove Blue       | <b>GW9002</b> Grey White | <b>PB1035</b> Pearl Beige   |
| <b>BMAT</b> Bronze Matte | <b>CW9001</b> Cream         | <b>HTHR</b> Heather      | <b>RUST</b> Rust            |
| <b>BRNZ</b> Bronze       | <b>GLIM</b> Glimmer         | <b>JB9005</b> Jet Black  | <b>SUNG</b> Sungold         |
| <b>BSIL</b> Blade Silver | <b>GSIL</b> Graphite Silver | <b>OBRZ</b> Old Bronze   | <b>TW9016</b> Traffic White |

Metal Finishes (Premium)

|                                       |  |                                     |
|---------------------------------------|--|-------------------------------------|
| <b>BA</b> Brushed Aluminum            | <b>BUA</b> Brushed Copper Alternative    | <b>PRA</b> Pewter Alternative       |
| <b>BBA</b> Brushed Brass Alternative  | <b>BZA</b> Brushed Bronze Alternative    | <b>RBA</b> Rustic Brass Alternative |
| <b>BCA</b> Brushed Chrome Alternative | <b>OBA</b> Oil-Rubbed Bronze Alternative | <b>SNA</b> Satin Nickel Alternative |

**D OPTIONS (Multiple Selections Allowed)**

⚠ Option availability may be interdependent with Voltage, Source or Other Options

|            |   |
|------------|---|
| <b>DCC</b> | Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations) |
| <b>RB</b>  | Pre-ship recessed components  |
| <b>TTF</b> | Tile trim flange; recessed installation in tile <b>C</b> painted - see finishes               |



ADA



ETL Listed




5 Year Warranty

## CV1970 – SLEIGHT


16" Recessed Mount - Integral Power Supply




### TILE TRIM FLANGE DETAIL (TTF)

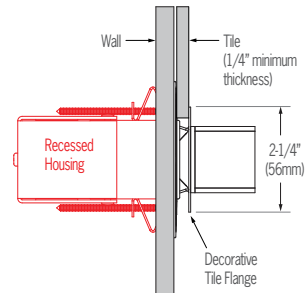

### MOUNTING DETAIL

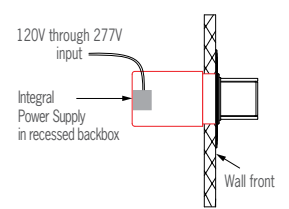

### Photometrics

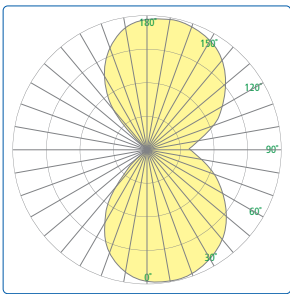

### Technical Information

- Integral driver
- Ceiling or Wall mount (horizontal or vertical orientation)
- Semi-recessed (mud-in required; mud frame included)
- Not for installation in ceiling grid system
- Optional recessed backbox is available for pre-shipment for rough-in installation
- Frosted acrylic diffuser
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

### Relative Scale Drawing

